

# BATTEN

## Indoor ADA Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.



**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.

**Body:** Formed .050 aluminum or 18ga steel.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Modifications:** Consult factory for lamping options.

**Surge Protection:** External surge protector provided.

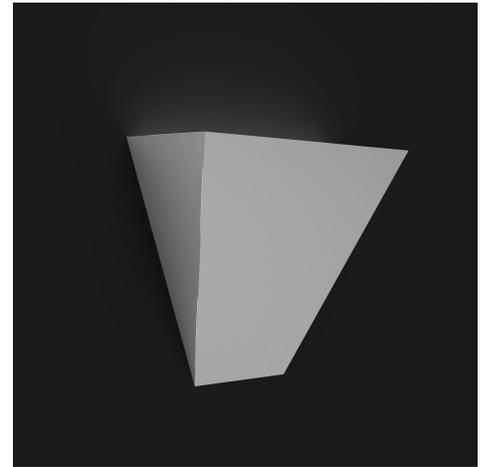

SAMPLE CATALOG NUMBER: GL-4505-		E5-	NSN-	A
MODEL NO.		LAMPING	FINISH	OPTION(S)
<b>GL-4505</b>	W in 14" mm 355 H in 10" mm 255 D in 4" mm 100	<b>E0.</b> 1LED30 <b>E5.</b> 1LED35 <b>E4.</b> 1LED40	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. <b>L.</b> Perforated Top Lens Painted white perforated metal top lens.

All dimensions are nominal.

### Light Source Definition

Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
1LED30	13W LED	+80	50000	3000	1895
1LED35	13W LED	+80	50000	3500	1895
1LED40	13W LED	+80	50000	4000	1895

Universal Voltage unless otherwise specified.