

FRONTIER

Indoor Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hanger.


Lamping: Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.

Acrylic: Acrylic is UL-94 HB Flame Class rated. Available with 3-Form.

Bottom Lens: Standard satin white acrylic.

Modifications: Also available in .080 brushed aluminum or painted bodies. Consult factory.

Cable Hanger: Supplied with standard 72" white cord and cable. Field adjustable.

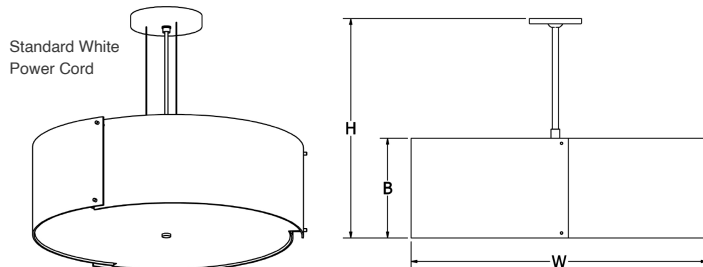

SAMPLE CATALOG NUMBER:						
GL-2505-	IN3-	W-	NSN-	1-	A-	020
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2505 W in 24" mm 610 18lbs B in 8" mm 205 7kg H in 20" mm 510	G. 4CFQ26 H. 4CFT26 I. 4CFT32 J. 4CFT42 IN3. 3MED	Standard: W White Opal S Satin White 3-Form: 3N Linen Contact factory for 3-Form or .080 Aluminum Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze	1. Stem  2. Cable  Standard White Power Cord	A. No Options DE. ECO Dimming Lutron Ecosystem dimming CF lamping option. Specify voltage and wattage after dimming code. DV. Mark VII Dimming Advance Mark VII dimming CF lamping option. Specify voltage and wattage after dimming code. DX. Mark X Dimming Advance Mark X dimming CF lamping option. Specify voltage and wattage after dimming code. E. Emergency Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°-131°F. Compact fluorescent only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-2506 W in 30" mm 760 20lbs B in 10" mm 255 7.9kg H in 22" mm 560						

All Dimensions are nominal.

Light Source Definition

Code	Fluorescent	Lamp Base	Rated Life Hrs ¹	Lumens ¹
CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530
CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530
CFT32	CFTR 32W	GX24q-3 4PIN	17000	2040
CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690
IN3		Medium		

¹Per MAXLTE lamp products catalog.