

SQUARE BEAM RGB+W

ADA Interior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.


Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

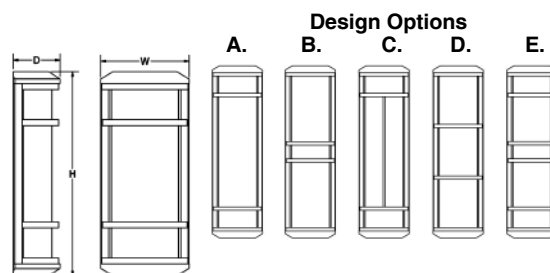

SAMPLE CATALOG NUMBER:						
GL-4471-		H-	S-	PA-	A-	
MODEL NO.		LAMPING	DIFFUSER	FINISH	DESIGN	
GL-4470 5lbs 2.3kg	W in 7 1/4" mm 185	Y. RED	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-4470	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
	H in 17" mm 430	Z. GREEN				
	D in 3 7/8" mm 125	AA. BLUE				
GL-4471 7lbs 3.2kg	W in 7 1/4" mm 185	BB. RGB				
	H in 25" mm 635	CC. 14RGB30				
	D in 3 7/8" mm 125	DD. 14RGB35				
		EE. 14RGB40				
		FF. RED				
		GG. GREEN				
		HH. BLUE				
GL-4472 10lbs 4.5kg	W in 7 1/4" mm 185	II. RGB				
	H in 37" mm 940	JJ. 14RGB30				
	D in 3 7/8" mm 125	KK. 14RGB35				
		LL. 14RGB40				
		MM. 28RGB30				
		NN. 28RGB35				
		OO. 28RGB40				
GL-4473 14lbs 6.3kg	W in 7 1/4" mm 185	PP. RED				
	H in 49" mm 1245	QQ. GREEN				
	D in 3 7/8" mm 125	RR. BLUE				
		SS. RGB				
		TT. 21RGB30				
		UU. 21RGB35				
		VV. 21RGB40				
		WW. 42RGB30				
		XX. 42RGB35				
		YY. 42RGB40				
	ZZ. RED					
	AB. GREEN					
	AC. BLUE					
	AD. RGB					
	AE. 28RGB30					
	AF. 28RGB35					
	AG. 28RGB40					
	AH. 56RGB30					
	AI. 56RGB35					
	AJ. 56RGB40					

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000	28RGB30	28W	+80	50000	1562	3000
14RGB35	14W	+80	50000	781	3500	28RGB35	28W	+80	50000	1562	3500
14RGB40	14W	+80	50000	781	4000	28RGB40	28W	+80	50000	1562	4000
21RGB30	21W	+80	50000	1171	3000	42RGB30	42W	+80	50000	2527	3000
21RGB35	21W	+80	50000	1171	3500	42RGB35	42W	+80	50000	2527	3500
21RGB40	21W	+80	50000	1171	4000	42RGB40	42W	+80	50000	2527	4000
Universal Voltage unless otherwise specified.						56RGB30	56W	+80	50000	3124	3000
						56RGB35	56W	+80	50000	3124	3500
						56RGB40	56W	+80	50000	3124	4000