

STOCKPORT

Interior ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.



Body: Spun .050 aluminum or 18ga steel.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.

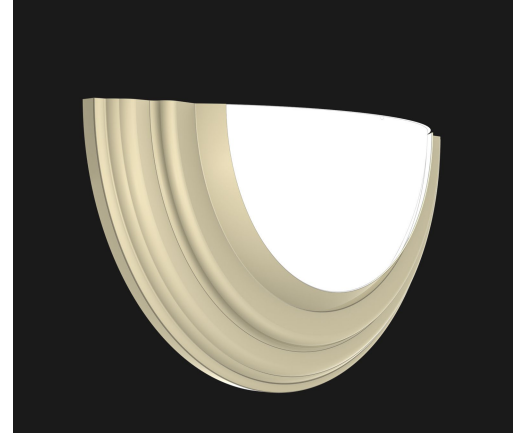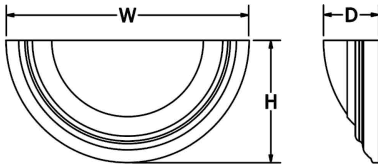

SAMPLE CATALOG NUMBER:				
GL-4090-		L15-	W-	SN-
MODEL NO.		LAMPING	ACRYLIC	FINISH
GL-4090 W in 16" mm 405 H in 8" mm 205 5lbs 2.3kg D in 4" mm 100		L10. 1LED30 L15. 1LED35 L14. 1LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBN- Terra Brown TBZ- Textured Bronze Premium: SA- Satin Aluminum SB- Satin Brass PB- Polished Brass AB- Antique Brass ORB- Oil Rubbed Bronze SC- Satin Chrome SN- Satin Nickel PC- Polished Copper SA- Satin Aluminum
			Acrylic is UL-94 HB Flame Class rated.	
GL-4091 W in 23" mm 790 H in 11 1/2" mm 290 7lbs 3.2kg D in 4" mm 100		L10. 1LED30 L15. 1LED35 L14. 1LED40		

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	14	+80	50000	1895	3000
L15	14	+80	50000	1895	3500
L14	14	+80	50000	1895	4000

Universal Voltage unless otherwise specified.