

CONE

Interior Pendant




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Uplight: Optional uplight is wired on a second circuit. Standard satin white top lens.
LED Dimming: Standard 1% 0-10V dimming.
Cable Hanger Option: Standard 150" cable and white cord for on-site adjustability.
Canopy: Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 9.125" dia by 2.625" H spinning. V, W, X lamping includes 12.5" dia by 2" H.
Driver: Max remote driver installation distance 25ft from fixture body.
Acrylic: Acrylic is UL-94 HB Flame Class rated.
Finish: Highly durable oven cured no VOC premium powder coat.
Inner Finish: Inner finish available in white, black, and gold liquid paint.
Non-white inner finishes will reduce lumen output.
Surge Protection: External surge protector provided as standard.

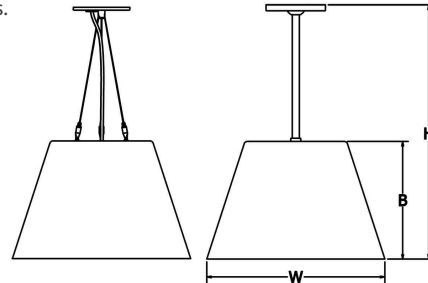

SAMPLE CATALOG NUMBER:							
GL-2350-	E-	K-	BLK-	MO-	1-	A	038
MODEL NO.	LAMPING	UPLIGHT	OUTER FINISH	INNER FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-2350 8lbs W 16" in 3.6kg B 11" in H 38" in	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30 E. 1LED35 F. 1LED40	NA. NONE P. 1UPLED30 Q. 1UPLED35 R. 1UPLED40 S. 1UPLED30 T. 1UPLED35 U. 1UPLED40	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum	Standard: MO-Matches Outer Finish Liquid Paint WH-White BLK-Black GL-Gold	1. Stem Mount Remote Driver Drivers mounted remotely 2. Cable Mount Remote Driver Drivers mounted remotely 3. Stem Mount Oversized Canopy Drivers mounted inside oversized canopy 4. Cable Mount Oversized Canopy Drivers mounted inside oversized canopy	A. No Options BC. Black Cord Fixture supplied with black power cord. DM. DMX Dimming EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.	Specify overall height in inches for hanger styles 1 & 3.
GL-2351 10lbs W 24" in 4.5kg B 15 3/8" in H 42" in	G. 1LED30 H. 1LED35 I. 1LED40 J. 1LED30 K. 1LED35 L. 1LED40 M. 1LED30 N. 1LED35 O. 1LED40 V. 1LED30* W. 1LED35* X. 1LED40* *Downlight and Remote Driver only.					Hanger options 1&2 supplied with remote driver box.	

All Dimensions are nominal.

Light Source Definition

Downlight Output						Downlight Output					
Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI	Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	1LED30	17W	1534	3000	80	V	1UPLED30	68W	5076*	3000	80
B	1LED35	17W	1534	3500	80	W	1UPLED35	68W	5076*	3500	80
C	1LED40	17W	1534	4000	80	X	1UPLED40	68W	5076*	4000	80
D	1LED30	24W	2148	3000	80	Uplight Output					
E	1LED35	24W	2148	3500	80						
F	1LED40	24W	2148	4000	80						
G	1LED30	15W	1361	3000	80						
H	1LED35	15W	1361	3500	80						
I	1LED40	15W	1361	4000	80	Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
J	1LED30	26W	2334	3000	80	P	1UPLED30	8W	866	3000	80
K	1LED35	26W	2334	3500	80	Q	1UPLED35	8W	866	3500	80
L	1LED40	26W	2334	4000	80	R	1UPLED40	8W	866	4000	80
M	1LED30	39W	3501	3000	80	S	1UPLED30	12W	1213	3000	80
N	1LED35	39W	3501	3500	80	T	1UPLED35	12W	1213	3500	80
O	1LED40	39W	3501	4000	80	U	1UPLED40	12W	1213	4000	80
*Projected						Universal Voltage unless otherwise specified.					
Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.											

*Projected

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.