

PHOENIX

Interior LED Pendant



9777 Reavis Park Drive
St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency high-power LED. Lumen maintenance +90% over 50,000 hour life. Light source is field replaceable.

Driver: Standard 1% 0-10V dimming. Max remote driver installation distance: 25ft from fixture body. Universal voltage 120-277V.


Body: Cast aluminum.

Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

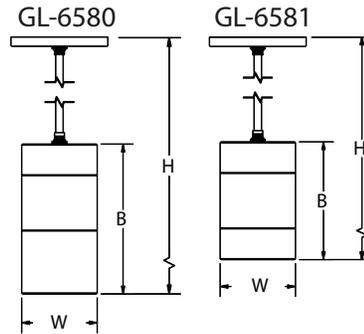

| SAMPLE CATALOG NUMBER: | | | | | | |
|--|--|--|---|--|--|---|
| GL-6580- | B- | R2- | TBL- | 1- | A- | 036 |
| MODEL NO. | LAMPING | REFLECTOR | FINISH | HANGER | OPTIONS | OVERALL HEIGHT |
| GL-6580 4lbs 2kg W 3 3/4in 95mm B 7 3/4in 195mm H 36in 915mm | C. LED30 B. LED35 E. LED40 F. LED30HO G. LED35HO H. LED40HO | Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens | Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum | 1. Stem Mount Remote Driver Driver mounted remotely. 2. Cord Driver mounted remotely. 3. Stem Mount Oversized Canopy Drivers mounted inside oversized canopy. 4. Cord Mount Oversized Canopy Drivers mounted inside oversized canopy. | A. No Options EL.Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord Fixture supplied with 150" of standard white cord or optional black cord. EXT. Exterior Wet Location available on stem mount only. | Specify overall height in inches for hanger styles 1 & 3. |
| GL-6581 4lbs 2kg W 3 3/4in 95mm B 6in 150mm H 36in 915mm | C. LED30 B. LED35 E. LED40 F. LED30HO G. LED35HO H. LED40HO | Down R5 50° Flat, Clear Lens | (Same as GL-6580) | (Same as GL-6580) | (Same as GL-6580) | (Same as GL-6580) |

All dimensions are nominal.

Light Source Definition

| Code | Kelvin | Reflector | Wattage | CRI | Delivered Lumens | Code | Kelvin | Reflector | Wattage | CRI | Delivered Lumens |
|-------|--------|-----------|---------|-----|------------------|---------|--------|-----------|---------|-----|------------------|
| LED30 | 3000K | 20° | 14W | +80 | 1462* | LED30HO | 3000K | 20° | 19W | +80 | 2070* |
| | | 30° | 14W | +80 | 1030 | | | 30° | 19W | +80 | 1446 |
| | | 50° | 14W | +80 | 1284 | | | 50° | 19W | +80 | 1741 |
| LED35 | 3500K | 20° | 14W | +80 | 1462* | LED35HO | 3500K | 20° | 19W | +80 | 2070* |
| | | 30° | 14W | +80 | 1030 | | | 30° | 19W | +80 | 1446 |
| | | 50° | 14W | +80 | 1284 | | | 50° | 19W | +80 | 1741 |
| LED40 | 4000K | 20° | 14W | +80 | 1462* | LED40HO | 4000K | 20° | 19W | +80 | 2070* |
| | | 30° | 14W | +80 | 1030 | | | 30° | 19W | +80 | 1446 |
| | | 50° | 14W | +80 | 1284 | | | 50° | 19W | +80 | 1741 |

Universal Voltage unless otherwise specified
*Pending LM79 testing