

BEAM RGB+W

Exterior Sconce



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.


Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

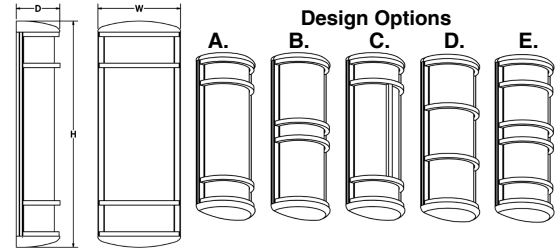

SAMPLE CATALOG NUMBER:									
GL-5451-				H-	S-	PA-	A-	A	
MODEL NO.				LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)	
GL-5450	W	in 7 1/4"	mm 185	Y. RED	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-5450	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
	5lbs	H	in 17"	mm 430					AA. BLUE
	2.3kg	D	in 3 7/8"	mm 125					BB. RGB
									CC. 14RGB30
				DD. 14RGB35					
				EE. 14RGB40					
GL-5451	W	in 7 1/4"	mm 185	FF. RED					
	7lbs	H	in 25"	mm 635					GG. GREEN
	3.2kg	D	in 3 7/8"	mm 125					HH. BLUE
									II. RGB
				JJ. 14RGB30					
				KK. 14RGB35					
				LL. 14RGB40					
				MM. 28RGB30					
				NN. 28RGB35					
				OO. 28RGB40					
GL-5452	W	in 7 1/4"	mm 185	PP. RED					
	10lbs	H	in 37"	mm 940	QQ. GREEN				
	4.5kg	D	in 3 7/8"	mm 125	RR. BLUE				
					SS. RGB				
				TT. 21RGB30					
				UU. 21RGB35					
				VV. 21RGB40					
				WW. 42RGB30					
				XX. 42RGB35					
				YY. 42RGB40					
GL-5453	W	in 7 1/4"	mm 185	ZZ. RED					
	14lbs	H	in 49"	mm 1245	AB. GREEN				
	6.3kg	D	in 3 7/8"	mm 125	AC. BLUE				
					AD. RGB				
				AE. 28RGB30					
				AF. 28RGB35					
				AG. 28RGB40					
				AH. 56RGB30					
				AI. 56RGB35					
				AJ. 56RGB40					

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	1244	3000	28RGB30	28W	+80	50000	2409	3000
14RGB35	14W	+80	50000	1244	3500	28RGB35	28W	+80	50000	2409	3500
14RGB40	14W	+80	50000	1244	4000	28RGB40	28W	+80	50000	2409	4000
21RGB30	21W	+80	50000	1745	3000	42RGB30	42W	+80	50000	3591	3000
21RGB35	21W	+80	50000	1745	3500	42RGB35	42W	+80	50000	3591	3500
21RGB40	21W	+80	50000	1745	4000	42RGB40	42W	+80	50000	3591	4000
						56RGB30	56W	+80	50000	4870	3000
						56RGB35	56W	+80	50000	4870	3500
						56RGB40	56W	+80	50000	4870	4000

Universal Voltage unless otherwise specified.