

BEAM with LED SPOT

Exterior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming 3.6W 225 lumen LED spot.

LED Reflector: 40° and 60° reflectors available.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: 0-10V dimming standard.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.


Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

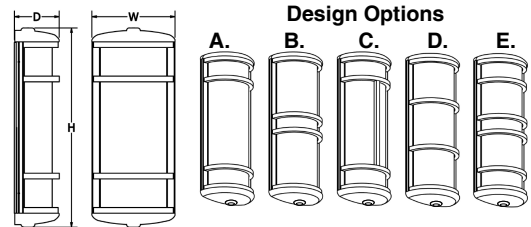

SAMPLE CATALOG NUMBER:						
GL-5461-		G-	C-	S-	PA-	A-
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5460 W in 7 1/4" H in 17 1/2" 5lbs D in 3 7/8" 2.3kg	A. 14LED30 C. 14LED40	A. 40° Uplight & No Downlight B. 60° Uplight & No Downlight C. 40° Downlight & No Uplight D. 60° Downlight & No Uplight E. 40° Up & Down F. 60° Up & Down G. 40° Up 60° Down H. 60° Up 40° Down	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-5460	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5461 W in 7 1/4" H in 27 1/2" 7lbs D in 3 7/8" 3.2kg	D. 14LED30 F. 14LED40 G. 28LED30 I. 28LED40					
GL-5462 W in 7 1/4" H in 39 1/2" 10lbs D in 3 7/8" 4.5kg	K. 21LED30 M. 21LED40 N. 42LED30 P. 42LED40					
GL-5463 W in 7 1/4" H in 51 1/2" 14lbs D in 3 7/8" 6.3kg	R. 28LED30 T. 28LED40 U. 56LED30 W. 56LED40					

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
14LED30	14W	80	1244	3000	3.6W	40°	80	225	3000 & 4000
14LED40	14W	80	1244	4000	3.6W	60°	80	225	3000 & 4000
21LED30	21W	80	1745	3000	Universal Voltage unless otherwise specified.				
21LED40	21W	80	1745	4000					
28LED30	28W	80	2409	3000					
28LED40	28W	80	2409	4000					
42LED30	42W	80	3591	3000					
42LED40	42W	80	3591	4000					
56LED30	56W	80	4870	3000					
56LED40	56W	80	4870	4000					