

BEAM

Exterior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: 0-10V dimming standard.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.


Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

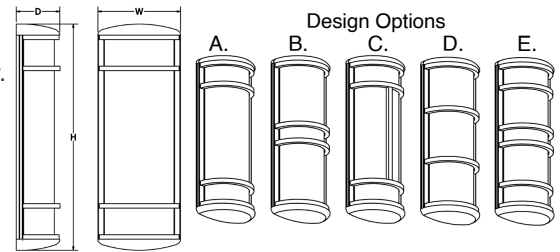

SAMPLE CATALOG NUMBER:					
GL-5451-		H-	S-	PA-	A-
MODEL NO.		LAMPING	DIFFUSER	FINISH	DESIGN
GL-5449	W in 7 1/4" mm 185 H in 12" mm 305 D in 3 7/8" mm 125 4lbs 1.8kg	AK. 10LED30 AL. 10LED35 AM. 10LED40	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum	Standard: A. Optional: B. C. D.* E.* *D&E not available with GL-5449. *E not available with GL-5450.
GL-5450	W in 7 1/4" mm 185 H in 17" mm 430 D in 3 7/8" mm 125 5lbs 2.3kg	A. 14LED30 B. 14LED35 C. 14LED40			
GL-5451	W in 7 1/4" mm 185 H in 25" mm 635 D in 3 7/8" mm 125 7lbs 3.2kg	D. 14LED30 E. 14LED35 F. 14LED40 G. 28LED30 H. 28LED35 I. 28LED40			
GL-5452	W in 7 1/4" mm 185 H in 37" mm 940 D in 3 7/8" mm 125 10lbs 4.5kg	K. 21LED30 L. 21LED35 M. 21LED40 N. 42LED30 O. 42LED35 P. 42LED40			
GL-5453	W in 7 1/4" mm 185 H in 49" mm 1245 D in 3 7/8" mm 125 14lbs 6.3kg	R. 28LED30 S. 28LED35 T. 28LED40 U. 56LED30 V. 56LED35 W. 56LED40			
					A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
10LED30	10W	92	50000	478	3000	28LED30	28W	80	50000	2409	3000
10LED35	10W	92	50000	478	3500	28LED35	28W	80	50000	2409	3500
10LED40	10W	92	50000	478	4000	28LED40	28W	80	50000	2409	4000
14LED30	14W	80	50000	1244	3000	42LED30	42W	80	50000	3591	3000
14LED35	14W	80	50000	1244	3500	42LED35	42W	80	50000	3591	3500
14LED40	14W	80	50000	1244	4000	42LED40	42W	80	50000	3591	4000
21LED30	21W	80	50000	1745	3000	56LED30	56W	80	50000	4870	3000
21LED35	21W	80	50000	1745	3500	56LED35	56W	80	50000	4870	3500
21LED40	21W	80	50000	1745	4000	56LED40	56W	80	50000	4870	4000

Universal Voltage unless otherwise specified.