

ORBIS

Inner Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Dimming: Standard 1% 0-10V dimming.

Driver: Max remote driver installation distance:



White LED 25ft from fixture body and RGB 45ft from fixture body.

RGB: DMX controller supplied by others.

Finish: Highly durable oven cured no VOC premium powder coat.

Mounting Plate: Matches fixture finish.

Surge Protection: External surge protector provided as standard.

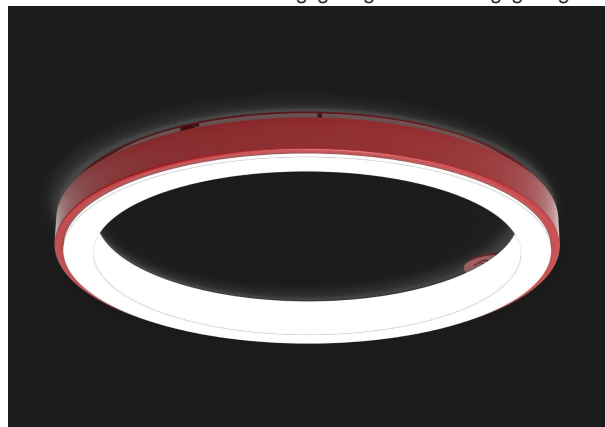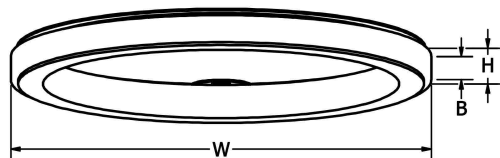

SAMPLE CATALOG NUMBER: GL-3721-				F-	BLK-	A
MODEL NO.		LAMPING		FINISH	OPTIONS	
GL-3720 W 24" 10lbs B 3" 4.5kg H 3.5"	A. 24LED30 AL. 24LED30LO		Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum* *Mounting Plate Painted Aluminum	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.		
	B. 24LED35 BL. 24LED35LO					
	C. 24LED40 CL. 24LED40LO					
	D. RGB					
GL-3736 W 36" 15lbs B 3" 6.8kg H 3.5"	U. 36LED30 UL. 36LED30LO					
	V. 36LED35 VL. 36LED35LO					
	W. 36LED40 WL. 36LED40LO					
	X. RGB					
GL-3721 W 48" 15lbs B 3" 6.8kg H 3.5"	E. 48LED30 EL. 48LED30LO					
	F. 48LED35 FL. 48LED35LO					
	G. 48LED40 GL. 48LED40LO					
	H. RGB					
GL-3737 W 60" 18lbs B 3" 8.2kg H 3.5"	Y. 60LED30 YL. 60LED30LO					
	Z. 60LED35 ZL. 60LED35LO					
	AA. 60LED40 AAL. 60LED40LO					
	BB. RGB					
GL-3722 W 72" 22lbs B 3" 10kg H 3.5" Fixture Built with Four Acrylic Segments	I. 72LED30 IL. 72LED30LO					
	J. 72LED35 JL. 72LED35LO					
	K. 72LED40 KL. 72LED40LO					
	L. RGB					

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	54	+80	50000	4135	3000/3500/4000	24LED30LO/35LO/40LO	32	+80	50000	2481	3000/3500/4000
36LED30/35/40	76	+80	50000	7261	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4357	3000/3500/4000
48LED30/35/40	106	+80	50000	10096	3000/3500/4000	48LED30LO/35LO/40LO	64	+80	50000	6058	3000/3500/4000
60LED30/35/40	131	+80	50000	12991	3000/3500/4000	60LED30LO/35LO/40LO	73	+80	50000	7143	3000/3500/4000
72LED30/35/40	152	+80	50000	14838	3000/3500/4000	72LED30LO/35LO/40LO	104	+80	50000	10159	3000/3500/4000
RGB	Contact Factory for Details										

Universal Voltage unless otherwise specified.

*Estimate