

COUPLET

Interior ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.


Body: Spun .050 aluminum or 18ga steel.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.

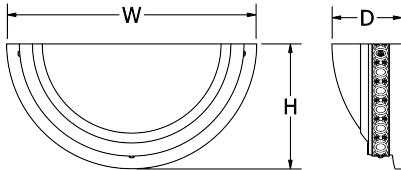

SAMPLE CATALOG NUMBER:				
GL-4150-		L15-	W-	SN-
MODEL NO.		LAMPING	ACRYLIC	FINISH
GL-4150 5lbs 2.3kg	W in 14 1/8" mm 360	L10. 1LED30	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum SB-Satin Brass PB-Polished Brass AB-Antique Brass ORB-Oil Rubbed Bronze SC-Satin Chrome SN-Satin Nickel PC-Polished Copper SA-Satin Aluminum
	H in 7" mm 180 D in 4" mm 100	L15. 1LED35 L14. 1LED40		
GL-4151 7lbs 3.2kg	W in 21" mm 535	L10. 1LED30		A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. L. Perforated Top Lens Painted white perforated metal top lens. TL. Acrylic Top Lens White acrylic top lens.
	H in 10 1/2" mm 265 D in 4" mm 100	L15. 1LED35 L14. 1LED40		

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	14	+80	50000	1895	3000
L15	14	+80	50000	1895	3500
L14	14	+80	50000	1895	4000

Universal Voltage unless otherwise specified.